

HERITAGE® 50

LAMINATED ASPHALT SHINGLES

PRODUCT DATA



MANUFACTURED IN FREDERICK, MD

HERITAGE® 50 shingles feature a double-layer fiberglass mat construction with a random-cut sawtooth design. The two layers of mat are coated with asphalt and then laminated together and surfaced with mineral granules. A self-sealing strip of asphalt helps provide wind resistance.

USES

For application to roof decks with inclines of not less than 2 inches per foot. For slopes between 2 inches and 4 inches per foot, refer to application instructions.

ADVANTAGES

- Lifetime* Limited Warranty, 7-year FULL START, limited transferability, winds up to 90 MPH‡.
- Shadowtone feature adds depth and dimensional appearance.
- 10-year Algae Relief-Algae Cleaning Limited Warranty that provides for cleaning of discoloration caused by certain algae growth that may occur in areas with high humidity.
- Rustic beauty of wood shakes.

* The Lifetime Limited Warranty Term for Heritage 50 Shingles applies only to owner occupied, single family, residential structures. The Term for Heritage 50 Shingles installed on multifamily, non-residential or non-owner occupied structures is 50 years. See TAMKO's Limited Warranty for complete details and restrictions as you make your purchase decision.

CERTIFICATIONS/REPORTS

Listed by UL for:
Class A Fire Rating
Wind Resistance
ASTM D 3462

Florida Building Code Approved

Tested in compliance with:
UL 790/ASTM E 108, Class A
ASTM D 3161, Type I, Class F (110 mph)
UL 2390/ASTM D 6381, Class H (150 mph)
ASTM D 7158, Class H (150 mph)
TAS 100-95 Wind and Wind Driven Rain
Miami-Dade County Florida NOA: 09-0720.03
Expiration Date: 03/21/12

COLORS

America's Natural Colors:


- Autumn Brown
- Black Walnut
- Natural Timber
- Thunderstorm Grey

Classic Heritage Colors:

- Aged Wood
- Olde English Pewter
- Oxford Grey
- Rustic Black
- Rustic Cedar
- Rustic Evergreen
- Rustic Redwood
- Rustic Slate
- Slatetone Grey
- Virginia Slate
- Weathered Wood

PRODUCT DATA†

Shingle size 12" x 36"
Exposure 5"
Coverage per Sales Square 100 sq.ft.
Shingles per Sales Square 80
Bundles per Sales Square 4

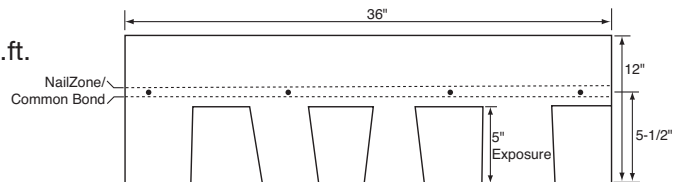

† All values stated as nominal
‡ 130 mph when applied in accordance with TAMKO's High Wind Application instructions.

CAUTION: The National Institute for Occupational Safety and Health (NIOSH) has concluded that fumes of heated asphalt are a potential occupational carcinogen. Do not heat or burn this product.



| | | | | |
|--------------------|----------------------|----------------|-------|--------------|
| Central District | 220 West 4th St. | Joplin, MO | 64801 | 800-641-4691 |
| Northeast District | 4500 Tamko Dr. | Frederick, MD | 21701 | 800-368-2055 |
| Southeast District | 2300 35th St. | Tuscaloosa, AL | 35401 | 800-228-2656 |
| Southwest District | 7910 S. Central Exp. | Dallas, TX | 75216 | 800-443-1834 |
| Western District | 5300 East 43rd Ave. | Denver, CO | 80216 | 800-530-8868 |

TAMKO Logo, Heritage®, and TAMKO® are registered trademarks, and the Heritage Roofer Logo is a trademark, of TAMKO® Building Products, Inc.

Information included in this product data sheet was current at time of printing. To obtain a copy of the most current version of this product data sheet, visit us online at tamko.com or call us at 800-641-4691.

For information regarding or a copy of TAMKO's Limited Warranty, contact your local TAMKO representative, visit us online at tamko.com, or call us at 800-641-4691.