

HERITAGE® VINTAGE

LAMINATED ASPHALT SHINGLES

PRODUCT DATA



MANUFACTURED IN PHILLIPSBURG, KS

HERITAGE® Vintage® laminated shingles enhance the beauty of any roof with their striking cuts and angular lines. The naturally deep shadow lines portray the look of real wood shakes. Self-sealing strips of asphalt on bottom side help provide wind resistance.

USES

For application to roof decks with inclines of not less than 2 inches per foot. For slopes between 2 inches and 4 inches per foot, refer to application instructions.

ADVANTAGES

- Lifetime* Limited Warranty, 10-year FULL START, limited transferability, winds up to 110 MPH†.
- Unique shingle construction creates distinction and greater depth of appearance.
- Heavyweight fiberglass mat for Class A fire resistance.
- 10-year Algae Relief-Algae Cleaning Limited Warranty that provides for cleaning of discoloration caused by certain algae growth that may occur in areas with high humidity.
- Alignment notches for ease of application.

* The Lifetime Limited Warranty Term for Heritage Vintage Shingles applies only to owner occupied, single family, residential structures. The Term for Heritage Vintage Shingles installed on multifamily, non-residential or non-owner occupied structures is 50 years. See TAMKO's Limited Warranty for complete details and restrictions as you make your purchase decision.

CERTIFICATIONS/REPORTS

Listed by UL for:
 Class A Fire Rating
 Wind Resistance
 ASTM D 3462

 ICC-ES ESR-1501
 Florida Building Code Approved

Tested in compliance with:
 UL 790/ASTM E 108, Class A
 ASTM D 3161, Type I, Class F (110 mph)
 UL 2390/ASTM D 6381, Class H (150 mph)
 ASTM D 7158, Class H (150 mph)
 Miami-Dade County Florida NOA: 06-0816.07,
 Expiration Date: 11/23/11


COLORS

Heritage Vintage Colors:

- Charcoal
- Chestnut
- Fossil Grey
- Prairie Gold
- Redwood
- Rustic Pine
- Weathered Wood

PRODUCT DATA†

Shingle size	17-1/2" x 40"
Exposure	5"
Coverage per Sales Square	100 sq.ft.
Shingles per Sales Square	72
Bundles per Sales Square	6
Sales Squares per pallet	6

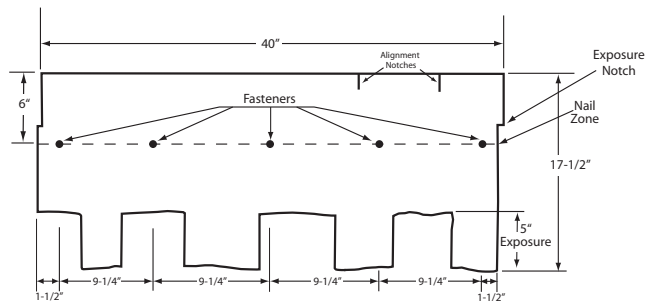

† All values stated as nominal
 ‡ 130 mph when applied in accordance with TAMKO's High Wind Application instructions.

CAUTION: The National Institute for Occupational Safety and Health (NIOSH) has concluded that fumes of heated asphalt are a potential occupational carcinogen. Do not heat or burn this product.



TAMKO Logo, Heritage®, Vintage®, and TAMKO® are registered trademarks, and the Heritage Roofer Logo is a trademark, of TAMKO® Building Products, Inc.

Central District	220 West 4th St.	Joplin, MO	64801	800-641-4691
Northeast District	4500 Tamko Dr.	Frederick, MD	21701	800-368-2055
Southeast District	2300 35th St.	Tuscaloosa, AL	35401	800-228-2656
Southwest District	7910 S. Central Exp.	Dallas, TX	75216	800-443-1834
Western District	5300 East 43rd Ave.	Denver, CO	80216	800-530-8868

Information included in this product data sheet was current at time of printing. To obtain a copy of the most current version of this product data sheet, visit us online at tamko.com or call us at 800-641-4691.

For information regarding or a copy of TAMKO's Limited Warranty, contact your local TAMKO representative, visit us online at tamko.com, or call us at 800-641-4691.