

MetalWorks®  
Steel Shingles.  
The look  
that lasts.



STYLE WITH STRENGTH.

  
**METALWORKS**  
STEEL SHINGLES **TAMKO**  
[metalworksroof.com](http://metalworksroof.com)



StoneCrest® Tile  
Vermont Blue



AstonWood®  
Sierra Slate Grey



AstonWood®  
Forest Green



MetalWorks® Steel Shingles pair the latest looks with the trusted strength of steel. And whether it's the sleek look of tile, the dramatic look of wood or the classic look of slate, MetalWorks products provide the right shingle for any taste. The shingles are available in three styles and a full array of cool colors, providing the ideal choice for a wide range of residential and commercial applications.

### **G-90 Steel Construction**

Recognized as the industry standard.

### **Kynar 500®/Hylar 5000® Finish**

Resists fading and chalking.

### **Perfect for Reroofing Applications**

Can be installed over up to two layers of asphalt shingles\*.

### **Better for the Environment**

100% recyclable and made from up to 50% recycled material.

### **50-Year Limited Warranty\*\***

From TAMKO® for your peace of mind.

### **Four-Way Locking System**

For enhanced performance.

### **Custom Color Matching**

For a color requirement that does not appear in Standard Colors, please contact TAMKO to inquire about our Special Color Program.

# CONTEMPORARY PROTECTION.


### **Energy-efficient Roofing**

All MetalWorks Steel Shingles are rated by the Cool Roof Rating Council (CRRC), and they deliver the solar reflectance performance that characterizes cool roof products. By reflecting more of the sun's energy, MetalWorks Steel Shingles can help reduce your energy costs. To view additional performance data, visit [metalworksroof.com](http://metalworksroof.com).



\* Check your local building code. Building code restrictions may apply.


\*\* To obtain a copy of TAMKO's limited warranty, visit us online at [tamko.com](http://tamko.com) or call us at 1-800-641-4691.

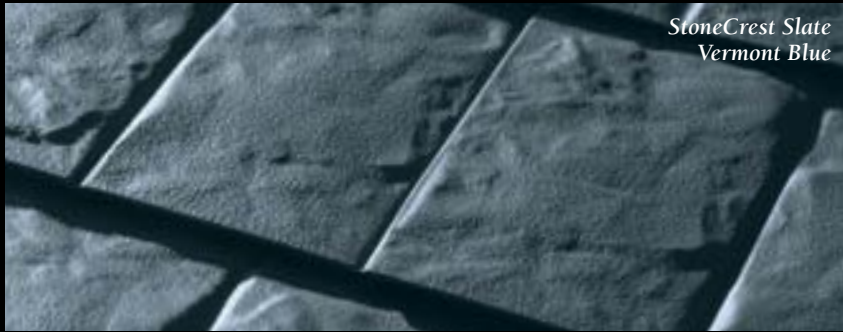

StoneCrest Slate  
Vermont Blue

### STONECREST® SLATE Steel Shingles

create a dramatic look that closely replicates the random finish of natural slate. They're made with a heavier-gauge steel and double stamped for stunning beauty and durability.

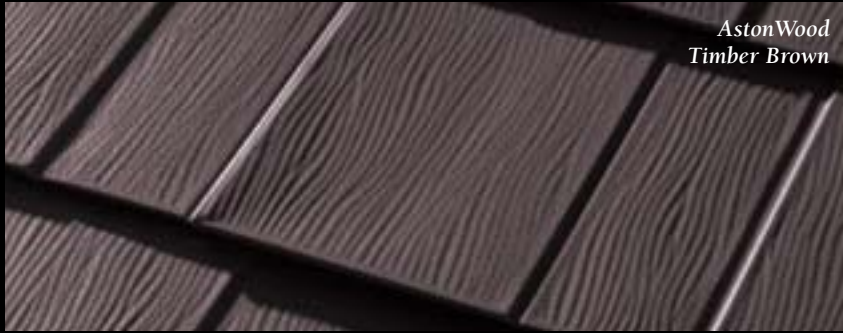

AstonWood  
Timber Brown

### ASTONWOOD® Steel Shingles

provide the traditional look of real wood shingles with a modern twist. They are much more durable than wood to help assure years of lasting beauty.



StoneCrest Tile  
Quaker Green

### STONECREST® TILE Steel Shingles

create the distinctive look of smooth, uniform tile. For those who appreciate a contemporary and refined appearance, these shingles provide outstanding performance and value.

#### COLORS

SS = StoneCrest Slate

AW = AstonWood

ST = StoneCrest Tile

SEQUOIA RED  
• SS • AW •

SIERRA SLATE GREY  
• SS • AW • ST •

VERMONT BLUE  
• SS • AW • ST •

FOREST GREEN  
• AW •

TIMBER BROWN  
• AW •

RIVER ROCK BROWN  
• AW •

BRITE RED  
• AW •

QUAKER GREEN  
• SS • ST •


CANYON COPPER  
BRONZE  
• AW •



### TW METAL & TILE UNDERLAYMENT

TW Metal and Tile Underlayment is well suited for application under metal roofs where prevention of water penetration is required. The underlayment also meets ASTM D 1970 for nail sealability of self-adhered roofing underlayments and withstands high temperature conditions up to 250°F.


NOTE: REPRODUCTION OF THESE COLORS IS AS ACCURATE AS OUR PRINTING WILL PERMIT. TAMKO RECOMMENDS VIEWING AN ACTUAL ROOF INSTALLATION OR SEVERAL FULL-SIZE SHINGLES PRIOR TO FINAL COLOR SELECTION FOR THE FULL IMPACT OF COLOR BLENDING AND PATTERNS.

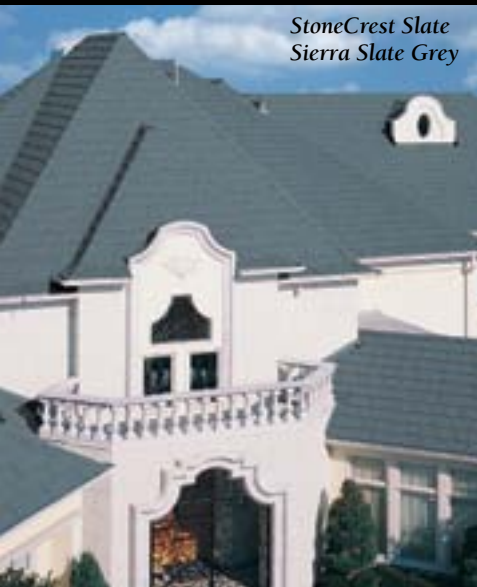


StoneCrest Slate  
Sierra Slate Grey

### MetalWorks® Steel Shingles














**AstonWood® Steel Shingle**  
30 pc. per carton/98.4 sq. ft. per carton • 61 lb. per square



**StoneCrest® Slate and StoneCrest® Tile Steel Shingles**  
15 pc. per carton/49.2 sq. ft. per carton • 74 lb. per square



### Metal Accessories

 <b>Starter/Eave Flashing</b> 10 pc. per carton/10' length	 <b>Gable/Rake Flashing</b> 10 pc. per carton/10' length	 <b>Valley</b> 5 pc. per carton/10' length	 <b>Sidewall Flashing</b> 5 pc. per carton/10' length	 <b>J-Channel</b> 10 pc. per carton/ 10' length
 <b>Hip Cap Tapered</b> StoneCrest or AstonWood 50 pc. per carton/1' length	 <b>12" Ridge Cap</b> 25 pc. per carton/ 1' length	 <b>Trim Coil</b> 22-1/4" x 50'	 <b>Clip</b> 400 per carton/ 100 +/- per square	 <b>Snow Guard</b> 100 pc. per carton
		 <b>Colored Screws</b> 0.5-lb. bag of 50 pc.	 <b>Hip &amp; Ridge Seal</b> 4" x 50'	
			 <b>Touch-up Paint</b> 2-oz. bottle	

### Non-Metal Accessories

## STONECREST SLATE

- Painted Galvanized Steel
- Minimum slope: 3" in 12"
- Shingle width—overall: 39-3/4"
- Shingle height—overall: 12-5/8"
- Shingle exposure: 12"
- Shingles per box: 15 panels
- Coverage per box: 49.2 sq. ft. (Approx. 1/2 square)
- Weight per shingle: 2.5 lb.
- Weight per square: 74 lb.

- Shingle Material: Nominal 0.0162" (0.066802 cm) thickness, including G-90 galvanization and paint coatings. Exterior finish is fluoropolymer (PVDF) with anticorrosive primer, 1 mil dry film thickness. Interior finish is a wash coat with anticorrosive primer, 0.6 mil dry film thickness
- Clip: 1-1/4" wide x 2-1/8" long x 0.20" deep
- Clip Material: 0.015" thick, G-90 galvanized steel

## ASTONWOOD

- Painted Galvanized Steel
- Minimum slope: 3" in 12"
- Shingle width—overall: 39-3/4"
- Shingle height—overall: 12-5/8"
- Shingle exposure: 12"
- Shingles per box: 30 panels
- Coverage per box: 98.4 sq. ft. (Approx. 1 square)
- Weight per shingle: 2 lb.
- Weight per square: 61 lb.

- Shingle Material: Nominal 0.0135" (0.03429 cm) thickness, including G-90 galvanization and paint coatings. Exterior finish is fluoropolymer (PVDF) with anticorrosive primer, 1 mil dry film thickness. Interior finish is a wash coat with anticorrosive primer, 0.6 mil dry film thickness
- Clip: 1-1/4" wide x 2-1/8" long x 0.20" deep
- Clip Material: 0.015" thick, G-90 galvanized steel

## STONECREST TILE

- Painted Galvanized Steel
- Minimum slope: 3" in 12"
- Shingle width—overall: 39-3/4"
- Shingle height—overall: 12-5/8"
- Shingle exposure: 12"
- Shingles per box: 15 panels
- Coverage per box: 49.2 sq. ft. (Approx. 1/2 square)
- Weight per shingle: 2.5 lb.
- Weight per square: 74 lb.

- Shingle Material: Nominal 0.0162" (0.066802 cm) thickness, including G-90 galvanization and paint coatings. Exterior finish is fluoropolymer (PVDF) with anticorrosive primer, 1 mil dry film thickness. Interior finish is a wash coat with anticorrosive primer, 0.6 mil dry film thickness
- Clip: 1-1/4" wide x 2-1/8" long x 0.20" deep
- Clip Material: 0.015" thick, G-90 galvanized steel

©2009 TAMKO Building Products, Inc.  
TAMKO, MetalWorks, StoneCrest, and AstonWood are registered trademarks of TAMKO Building Products, Inc.  
Kynar 500 is a registered trademark of Arkema, Inc.  
Hylar 5000 is a registered trademark of Solvay Solexis, Inc.



Information included in this brochure was current at the time of printing. To obtain a copy of the most current version of this brochure, visit us online at tamko.com or call us at 1-800-641-4691.

Roof color on cover is StoneCrest Slate in Sequoia Red.

P.O. Box 1404 • Joplin, MO 64802  
1-800-641-4691  
tamko.com