

# HERITAGE® 30

## LAMINATED ASPHALT SHINGLES

### PRODUCT DATA



MANUFACTURED IN FREDERICK, MD

HERITAGE 30® shingles feature a double-layer fiberglass mat construction with a random-cut sawtooth design. The two layers of mat are coated with asphalt and then laminated together and surfaced with mineral granules. A self-sealing strip of asphalt helps provide wind resistance.

#### USES

For application to roof decks with inclines of not less than 2 inches per foot. For slopes between 2 inches and 4 inches per foot, refer to application instructions.

#### ADVANTAGES

- 30-year Limited Warranty, 5-year FULL START, limited transferability, winds up to 80 MPH\*\*.
- Shadowtone feature adds depth and dimensional appearance.
- 10-year Algae Relief-Algae Cleaning Limited Warranty that provides for cleaning of discoloration caused by certain algae growth that may occur in areas with high humidity.
- Rustic beauty of wood shakes.

#### CERTIFICATIONS/REPORTS

Listed by UL for:  
 Class A Fire Rating  
 Wind Resistance  
 ASTM D 3462  
  
 Florida Building Code Approved

Tested in compliance with:  
 UL 790/ASTM E 108, Class A  
 ASTM D 3161, Type I, Class F (110 mph)  
 UL 2390/ASTM D 6381, Class H (150 mph)  
 ASTM D 7158, Class H (150 mph)  
 TAS 100-95 Wind and Wind Driven Rain  
 Miami-Dade County Florida NOA: 09-0720.03  
 Expiration Date: 03/21/12

#### COLORS

##### America's Natural Colors:


- Autumn Brown
- Natural Timber
- Thunderstorm Grey

##### Classic Heritage Colors:

- Aged Wood
- Rustic Cedar
- Slatetone Grey
- Olde English Pewter
- Rustic Evergreen
- Virginia Slate
- Oxford Grey
- Rustic Redwood
- Weathered Wood
- Rustic Black
- Rustic Slate

#### PRODUCT DATA\*

Shingle size 12" x 36-3/8"  
 Exposure 5"  
 Coverage per Sales Square 98.5 sq.ft.  
 Shingles per Sales Square 78  
 Bundles per Sales Square 3

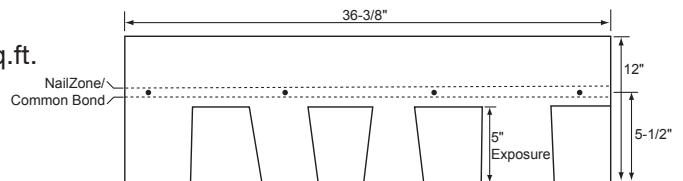

\*All values stated as nominal  
 \*\*110 mph when applied in accordance with TAMKO's High Wind Application instructions.

CAUTION: The National Institute for Occupational Safety and Health (NIOSH) has concluded that fumes of heated asphalt are a potential occupational carcinogen. Do not heat or burn this product.



|                    |                      |                |       |              |
|--------------------|----------------------|----------------|-------|--------------|
| Central District   | 220 West 4th St.     | Joplin, MO     | 64801 | 800-641-4691 |
| Northeast District | 4500 Tamko Dr.       | Frederick, MD  | 21701 | 800-368-2055 |
| Southeast District | 2300 35th St.        | Tuscaloosa, AL | 35401 | 800-228-2656 |
| Southwest District | 7910 S. Central Exp. | Dallas, TX     | 75216 | 800-443-1834 |
| Western District   | 5300 East 43rd Ave.  | Denver, CO     | 80216 | 800-530-8868 |

TAMKO Logo, Heritage®, and TAMKO® are registered trademarks, and the Heritage Roofer Logo is a trademark, of TAMKO® Building Products, Inc.

Information included in this product data sheet was current at time of printing. To obtain a copy of the most current version of this product data sheet, visit us online at tamko.com or call us at 800-641-4691.

For information regarding or a copy of TAMKO's Limited Warranty, contact your local TAMKO representative, visit us online at tamko.com, or call us at 800-641-4691.